

# ArborBrace®

## Tree Guying System

(305) 992-4104

### Arborbrace Tree Guying Specifications:

#### ATG-R/ATG-HD

For up to 4" Caliper Trees

(3) Polypropylene guylines 3/4" X 12'=800 lb

test, olive drab, UV resistant

(3) Nickel plated spring cam-lock


tension clips

(3) Arrowhead Nylon Anchors (4" X 3-3/4")

or


(3) Arrowhead Metal Anchors for hard soil

(4" X 3-3/4")

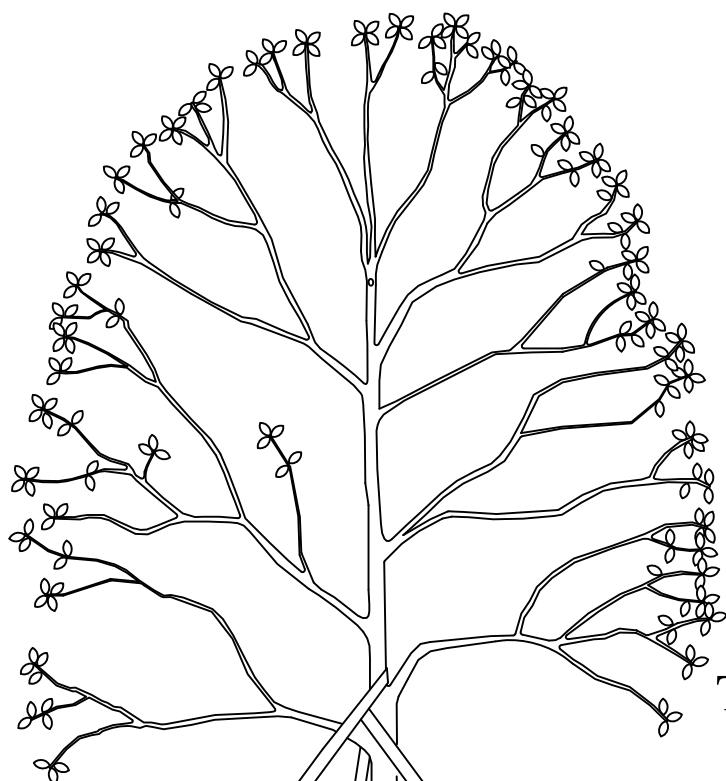

### ArborAnchor™

ArborAnchor driven below grade to necessary depth determined by soil. (1.5 to 2.5 feet as required)




GUY  
LINE

NEW  
PLANTING  
SOIL  
BACKFILLED  
TO  
CREATE  
WATERING  
RING

NO  
MULCH  
NEAR  
TRUNK  
3 INCH  
LAYER  
OF MULCH

EXISTING  
SOIL

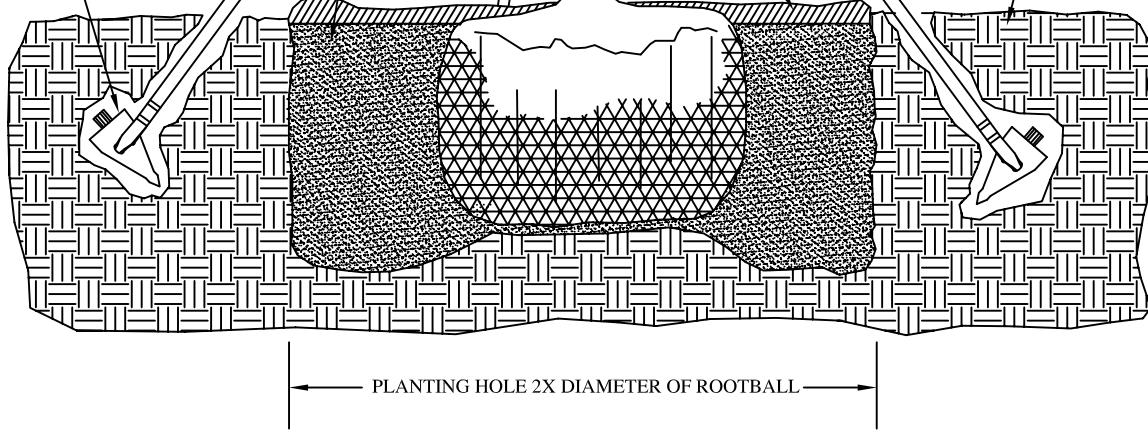

### Tension Buckle

Loop loose end of webbing around leading branch of tree. Tie 1/2 knot onto backside of buckle. Pull buckle towards ArborAnchor to tension line.

